




Capture. Retain. Reduce.

Washable, loose laid contamination control mat.

Specially designed and manufactured to capture, retain and reduce foot-borne viable and non-viable particulates, enabling effective contamination protection. **Installation is easy** - simply unroll and move into the desired area - **no fuss and maximum flexibility.**

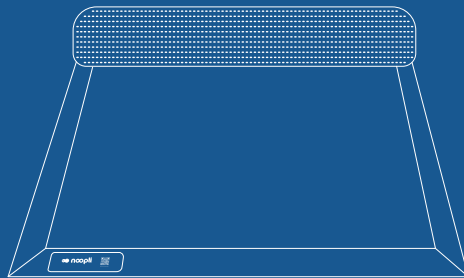

Embedded into Noopli surface.



1-2 YEAR LIFE

Expected life dependent on environment.



Foot and very light wheeled traffic.



Repositionable as and when needed.



Use, clean, repeat. No unnecessary waste created.



Max 100kg per mat area (wheeled traffic).



Quick and easy cleaning.



3.5 mm overall thickness.

3-4

Steps and wheel rotations needed.




ESD - 10^9-10 .



Capture.



Retain.




Reduce.

Noopli effectively captures contamination from feet and wheels and retains it, reducing contamination spread into controlled areas. Simply clean as per your SOP and Noopli will continue to perform throughout its working life.



Available sizes*:

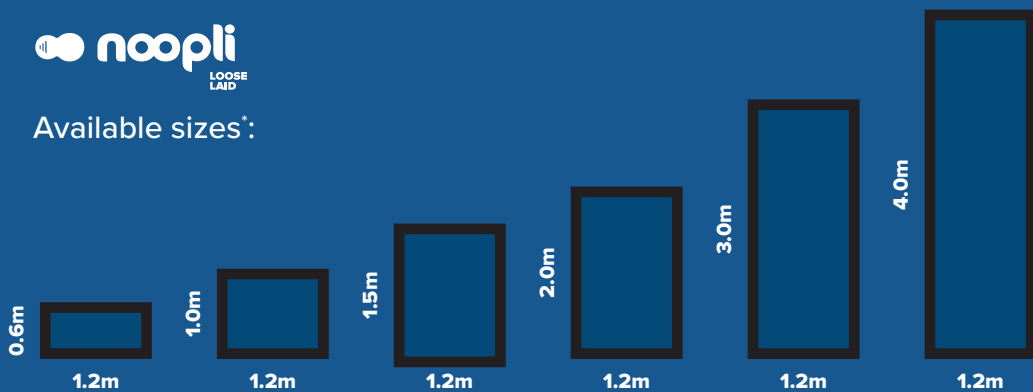

*2m widths, colour variants and bespoke sizes are also available. Please contact your Noopli representative for more information,

